

CHIKU BY LEONIER : POLYAMIDE CABLE GLAND

TECHNICAL DETAILS

Material: Nylon PA

V0: Flammability rating in acc. with UL94

Sealing: Modified rubber, please consult us if need Silical gel material

Protection Degree: Within the clamping range, with O-ring, IP68

Temperature Range: -40°C 100°C (Short-term 120°C)


Colour: Black, Gray, Light Gray

Size: PG, Metric

Features:

- Polyamide Cable Glands are manufactured using special grade Polyamide .
- These Glands offers high Impact Strength and are suitable for different sizes of the Cables.
- Connecting more smoothly & closely with double-thread & O-ring groove.
- Protecting connection safe by using modified rubber sleeve.

CHIKU BY LEONIER UL APPROVED CABLE GLAND

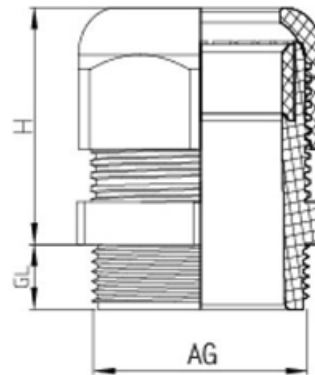

RSKP-PG THREAD

Thread	Code	Colour Options	Clamp Range (mm)	AG (mm)	Thread GL (mm)	H (mm)
PG-7	RSKP-PG7	Black, Gray, Light Gray	3-6.5	12.5	8	21
PG-9	RSKP-PG9	Black, Gray, Light Gray	4-8	15.2	8	22
PG-11	RSKP-PG11	Black, Gray, Light Gray	5-10	18.6	8	25
PG-13.5	RSKP-PG13.5	Black, Gray, Light Gray	6-12	20.4	9	27
PG-16	RSKP-PG16	Black, Gray, Light Gray	8-14	22.5	10	28
PG-21	RSKP-PG21	Black, Gray, Light Gray	13-18	28.3	11	31
PG-29	RSKP-PG29	Black, Gray, Light Gray	18-25	37	11	39
PG-36	RSKP-PG36	Black, Gray, Light Gray	22-32	47	13	48
PG-48	RSKP-PG48	Black, Gray, Light Gray	37-44	59.3	14	49

RSKP-PG THREAD

Thread	Code	Colour Options	Clamp Range (mm)	AG (mm)	Thread GL (mm)	H (mm)
PG-7	RSKP-PG7-L	Black, Gray, Light Gray	3-6.5	12.5	15	21
PG-9	RSKP-PG9-L	Black, Gray, Light Gray	4-8	15.2	15	22
PG-11	RSKP-PG11-L	Black, Gray, Light Gray	5-10	18.6	15	25
PG-13.5	RSKP-PG13.5-L	Black, Gray, Light Gray	6-12	20.4	15	27
PG-16	RSKP-PG16-L	Black, Gray, Light Gray	8-14	22.5	15	28
PG-21	RSKP-PG21-L	Black, Gray, Light Gray	13-18	28.3	15	31
PG-29	RSKP-PG29-L	Black, Gray, Light Gray	18-25	37	15	39
PG-36	RSKP-PG36-L	Black, Gray, Light Gray	22-32	47	18	48
PG-48	RSKP-PG48-L	Black, Gray, Light Gray	37-44	59.3	18	49



PRODUCT RANGE